


$V_{CE} = 1200\text{ V}$
 $I_C = 75\text{ A}$

IGBT-Die

5SMY 12J1280



Die size: 10.2 x 10.2 mm

Doc. No. 5SYA 1321-04 12 14

- Ultra low loss thin IGBT die
- Highly rugged SPT+ design
- Large bondable emitter area
- Passivation : Silicon Nitride plus Polyimide

Maximum rated values ¹⁾

Parameter	Symbol	Conditions	min	max	Unit
Collector-emitter voltage	V_{CES}	$V_{GE} = 0\text{ V}, T_{vj} \geq 25\text{ °C}$		1200	V
DC collector current	I_C			75	A
Peak collector current	I_{CM}	Limited by T_{vjmax}		150	A
Gate-emitter voltage	V_{GES}		-20	20	V
IGBT short circuit SOA	t_{psc}	$V_{CC} = 900\text{ V}, V_{CEM} \leq 1200\text{ V}$ $V_{GE} \leq 15\text{ V}, T_{vj} \leq 125\text{ °C}$		10	μs
Junction temperature	T_{vj}			175	°C
	$T_{vj(op)}$		-40	150	

¹⁾ Maximum rated values indicate limits beyond which damage to the device may occur per IEC 60747 - 9

IGBT characteristic values ²⁾

Parameter	Symbol	Conditions	min	typ	max	Unit
Collector (-emitter) breakdown voltage	$V_{(BR)CES}$	$V_{GE} = 0 \text{ V}$, $I_C = 1 \text{ mA}$, $T_{vj} = 25 \text{ °C}$	1200			V
Collector-emitter saturation voltage	$V_{CE \text{ sat}}$	$I_C = 75 \text{ A}$, $V_{GE} = 15 \text{ V}$	$T_{vj} = 25 \text{ °C}$	1.9	2.2	V
			$T_{vj} = 125 \text{ °C}$	2.1		V
Collector cut-off current	I_{CES}	$V_{CE} = 1200 \text{ V}$, $V_{GE} = 0 \text{ V}$	$T_{vj} = 25 \text{ °C}$		100	μA
			$T_{vj} = 125 \text{ °C}$	85		μA
Gate leakage current	I_{GES}	$V_{CE} = 0 \text{ V}$, $V_{GE} = \pm 20 \text{ V}$, $T_{vj} = 125 \text{ °C}$	-200		200	nA
Gate-emitter threshold voltage	$V_{GE(TO)}$	$I_C = 3 \text{ mA}$, $V_{CE} = V_{GE}$, $T_{vj} = 25 \text{ °C}$	5		7	V
Gate charge	Q_{ge}	$I_C = 75 \text{ A}$, $V_{CE} = 600 \text{ V}$, $V_{GE} = -15 \dots 15 \text{ V}$		780		nC
Input capacitance	C_{ies}	$V_{CE} = 25 \text{ V}$, $V_{GE} = 0 \text{ V}$, $f = 1 \text{ MHz}$, $T_{vj} = 25 \text{ °C}$		5.52		nF
Output capacitance	C_{oes}			0.40		
Reverse transfer capacitance	C_{res}			0.26		
Internal gate resistance	R_{Gint}			3		Ω
Turn-on delay time	$t_{d(on)}$	$V_{CC} = 600 \text{ V}$, $I_C = 75 \text{ A}$, $R_G = 15 \text{ }\Omega$, $V_{GE} = \pm 15 \text{ V}$,	$T_{vj} = 25 \text{ °C}$	165		ns
			$T_{vj} = 125 \text{ °C}$	175		
Rise time	t_r	$L_\sigma = 60 \text{ nH}$, inductive load	$T_{vj} = 25 \text{ °C}$	75		ns
			$T_{vj} = 125 \text{ °C}$	70		
Turn-off delay time	$t_{d(off)}$	$V_{CC} = 600 \text{ V}$, $I_C = 75 \text{ A}$, $R_G = 15 \text{ }\Omega$, $V_{GE} = \pm 15 \text{ V}$,	$T_{vj} = 25 \text{ °C}$	435		ns
			$T_{vj} = 125 \text{ °C}$	500		
Fall time	t_f	$L_\sigma = 60 \text{ nH}$, inductive load	$T_{vj} = 25 \text{ °C}$	50		ns
			$T_{vj} = 125 \text{ °C}$	70		
Turn-on switching energy	E_{on}	$V_{CC} = 600 \text{ V}$, $I_C = 75 \text{ A}$, $V_{GE} = \pm 15 \text{ V}$, $R_G = 15 \text{ }\Omega$, $L_\sigma = 60 \text{ nH}$, inductive load, FWD: 5SLY 12F1200	$T_{vj} = 25 \text{ °C}$	9.3		mJ
			$T_{vj} = 125 \text{ °C}$	12.4		
Turn-off switching energy	E_{off}	$V_{CC} = 600 \text{ V}$, $I_C = 75 \text{ A}$, $V_{GE} = \pm 15 \text{ V}$, $R_G = 15 \text{ }\Omega$, $L_\sigma = 60 \text{ nH}$, inductive load	$T_{vj} = 25 \text{ °C}$	4.5		mJ
			$T_{vj} = 125 \text{ °C}$	7.5		
Short circuit current	I_{SC}	$t_{psc} \leq 10 \text{ }\mu\text{s}$, $V_{GE} = 15 \text{ V}$, $T_{vj} = 125 \text{ °C}$, $V_{CC} = 900 \text{ V}$, $V_{CEM} \leq 1200 \text{ V}$		350		A

²⁾ Characteristic values according to IEC 60747 - 9

Mechanical properties


Parameter				Unit
Dimensions	Overall die	L x W	10.2 x 10.2	mm
	exposed front metal	L x W (except gate pad)	8.7 x 8.7	mm
	gate pad	L x W	1.12 x 1.14	mm
	thickness		140 ± 20	µm
Metallization ³⁾	front (E)	AlSi1	4	µm
	back (C)	Al / Ti / Ni / Ag	1.2	µm

³⁾ For assembly instructions refer to : IGBT and Diode chips from ABB Switzerland Ltd, Semiconductors, Doc. No. 5SYA 2033.

Form of delivery

Description	Part number
Unsaun 6" wafer die	5SMY 76J1280
Sawn 6" wafer die (on blue tape)	5SMY 86J1280

Outline drawing

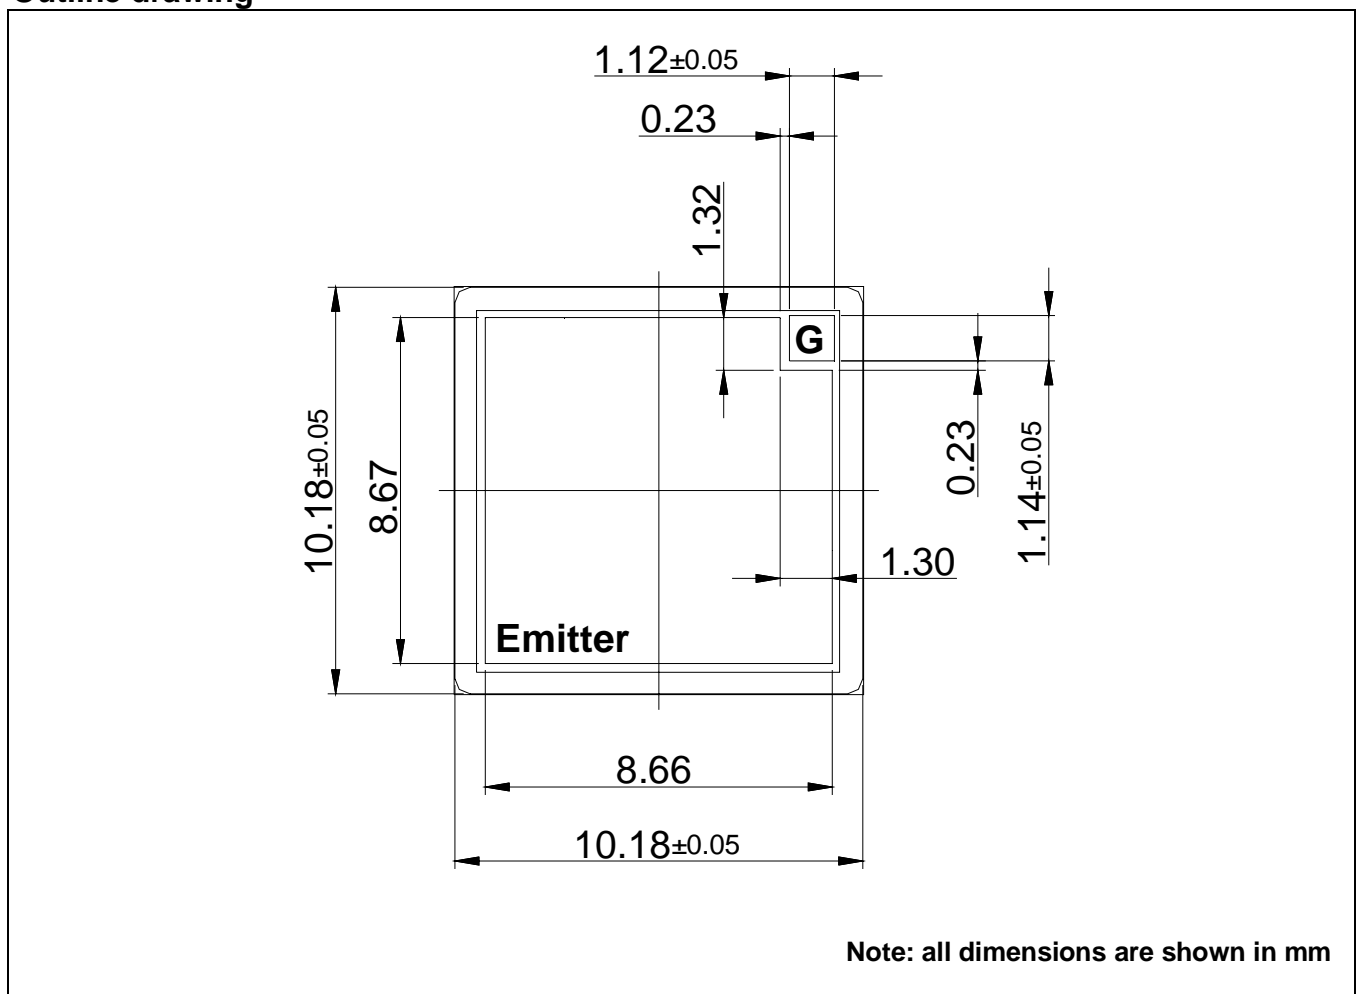

This is an electrostatic sensitive device, please observe the international standard IEC 60747-1, Chap. IX.

This product has been designed and qualified for Industrial Level.

ABB Switzerland Ltd, Semiconductors reserves the right to change specifications without notice.

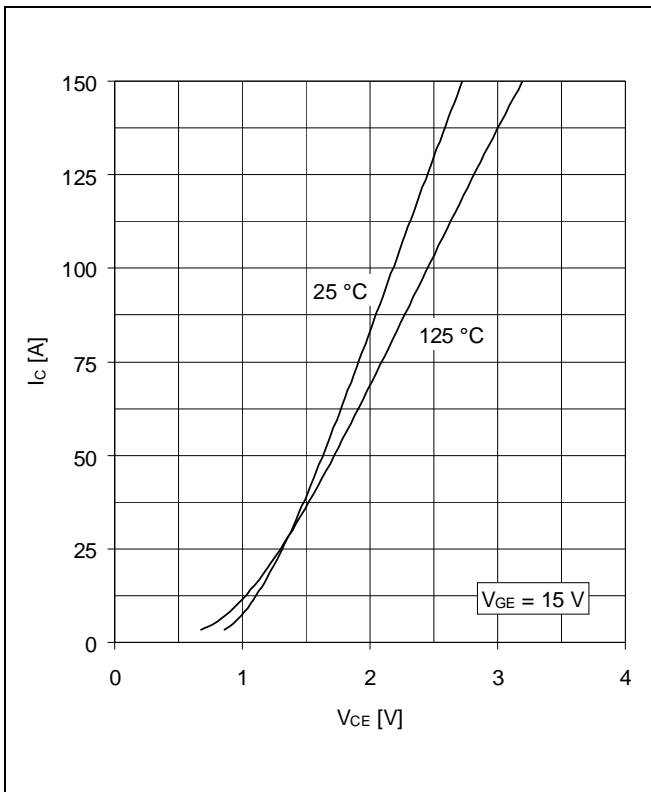


Fig. 1 Typical on-state characteristics

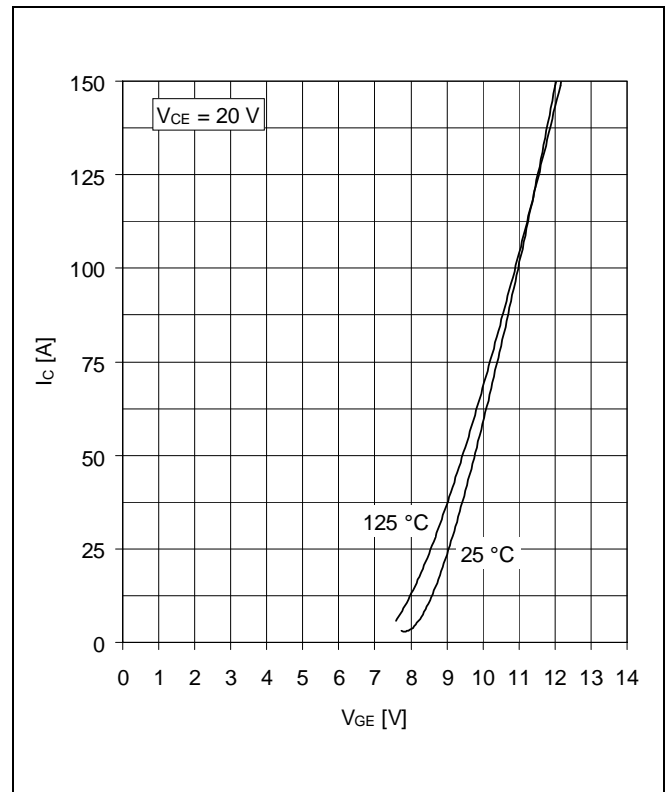


Fig. 2 Typical transfer characteristics

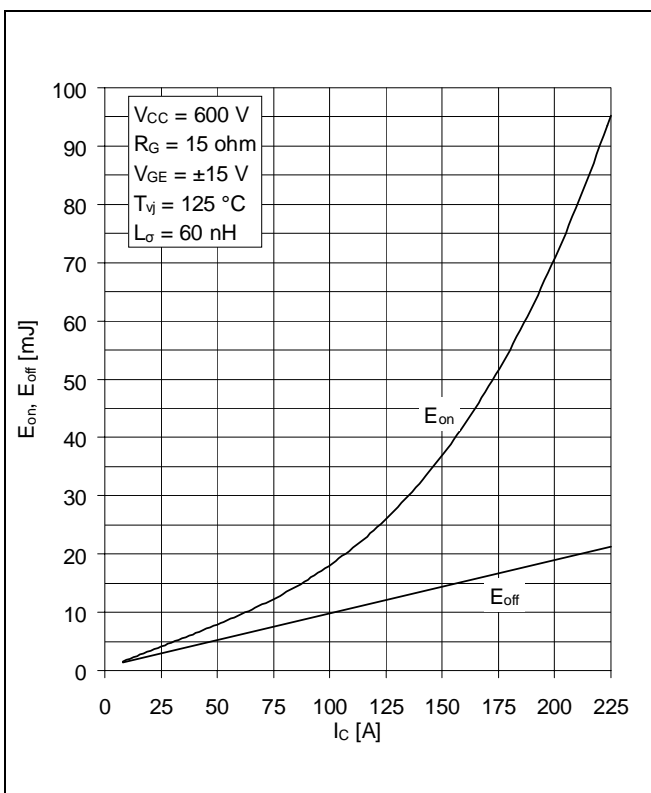


Fig. 3 Typical switching characteristics vs collector current

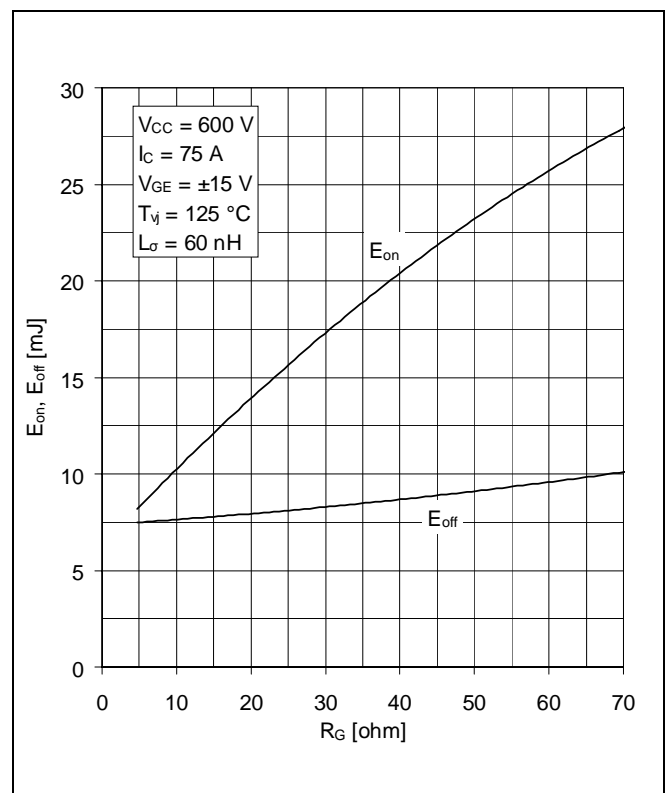


Fig. 4 Typical switching characteristics vs gate resistor

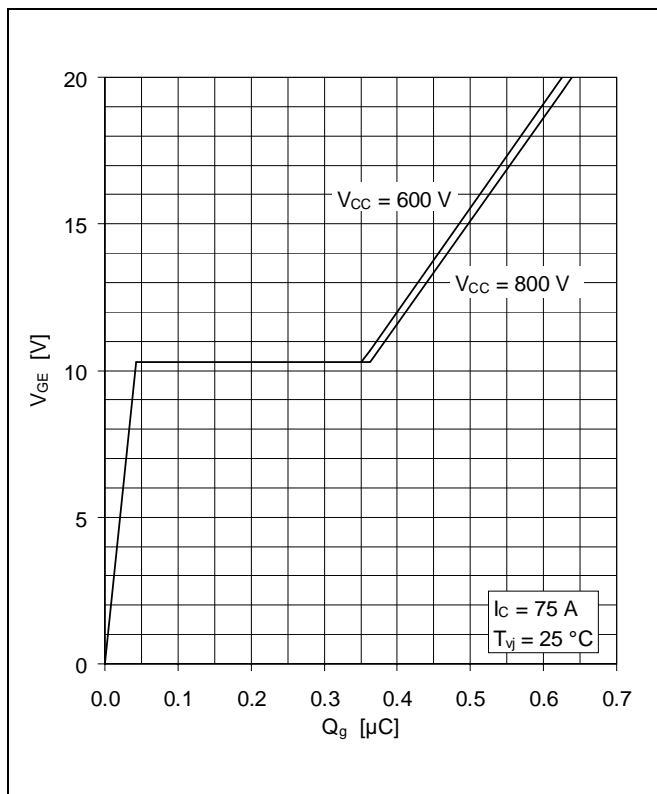


Fig. 5 Typical gate charge characteristics

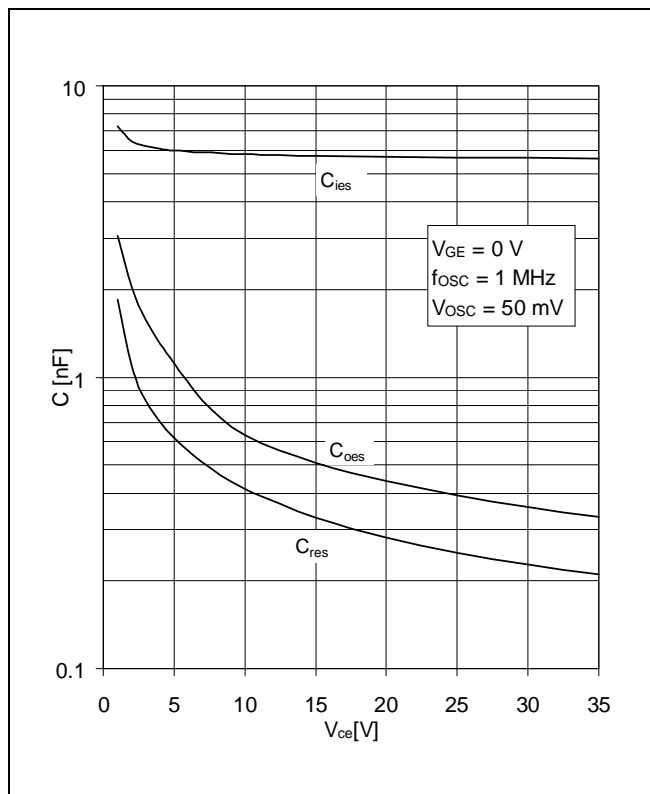


Fig. 6 Typical capacitances vs collector-emitter voltage

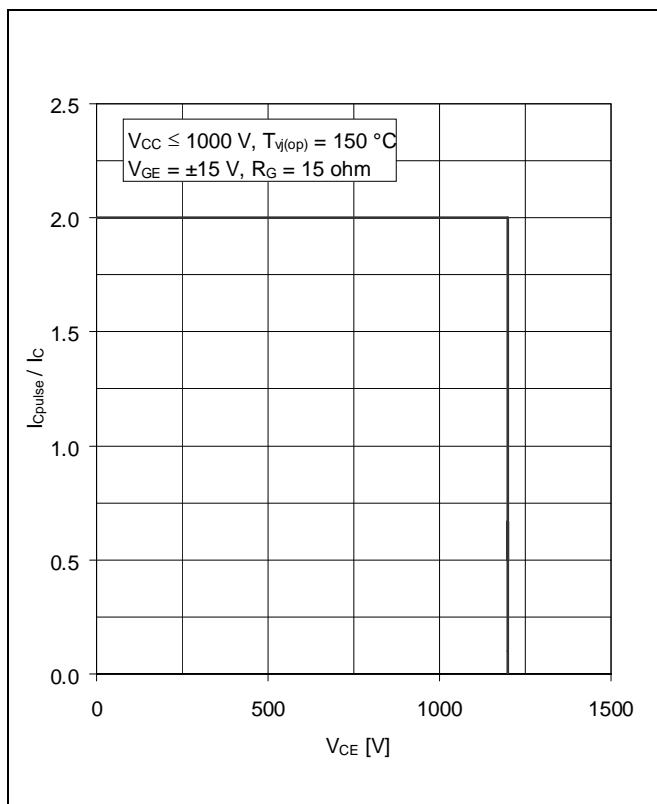


Fig. 7 Safe operating area (RBSOA)

This is an electrostatic sensitive device, please observe the international standard IEC 60747-1, chap. IX.
This product has been designed and qualified for Industrial Level.

Related documents:

5SYA 2045 Thermal runaway during blocking
5SYA 2059 Applying IGBT and Diode dies
5SYA 2093-00 Thermal design of IGBT Modules

We reserve the right to make technical changes or to modify the contents of this document without prior notice. We reserve all rights in this document and the information contained therein. Any reproduction or utilisation of this document or parts thereof for commercial purposes without our prior written consent is forbidden. Any liability for use of our products contrary to the instructions in this document is excluded.

ABB Switzerland Ltd, Semiconductors reserves the right to change specifications without notice.



ABB Switzerland Ltd
Semiconductors
Fabrikstrasse 3
CH-5600 Lenzburg, Switzerland

Doc. No. 5SYA 1321-04 12 14

Telephone +41 (0)58 586 1419
Fax +41 (0)58 586 1306
Email abbsem@ch.abb.com
Internet www.abb.com/semiconductors