

Types SCL and SCL-D Indoor current transformers

Product features

- 600 volt, indoor, 10 kV BIL
- 25-400 Hertz
- Primary amperes: 200 - 4000

Application

The SCL and SCL-D current transformers are used as the source of current for relaying and metering.

Construction features

The ring-type core is insulated and toroidally wound with a fully distributed secondary winding. The protective case, made of an impact-resistant polycarbonate, is ultrasonically sealed.

Secondary terminals

Secondary terminals are 10-32 brass terminal studs with hardware.

Curves

Saturation, overcurrent, ratio correction factor, and phase-angle curves are available upon request.

Test reports


IEEE test reports are stored electronically and can be e-mailed in various formats at the time of shipment.

Standards

These units meet all applicable IEEE and NEMA standards and are UL Recognized Components.




Unit dimensions

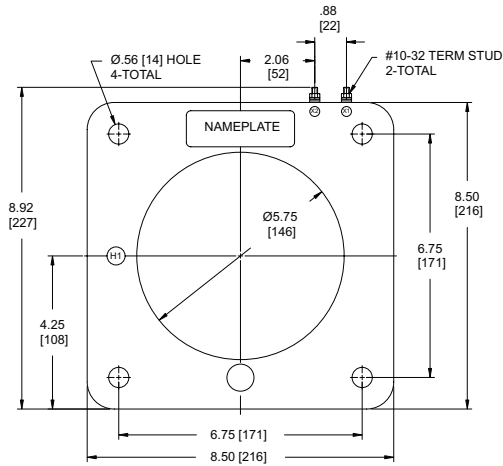


Type SCL

Note: dimensions are in inches and [mm].

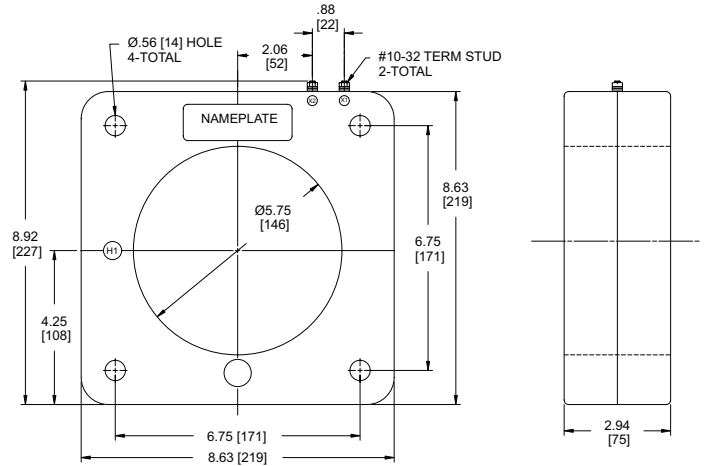

Type SCL-D

Type	Window size		Thickness		Approximate weight (lbs)
	(in)	(mm)	(in)	(mm)	
SCL	5.75	146	2.13	54	10
SCL-D	5.75	146	2.94	75	16

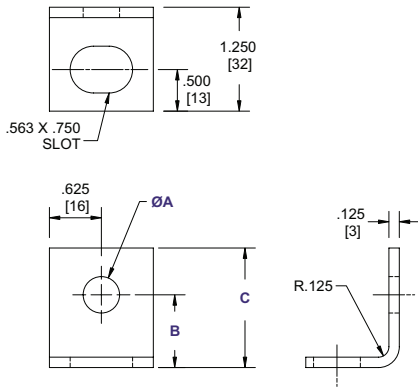

Optional mounting feet

Mounting feet dimensions					
A		B		C	
(in)	(mm)	(in)	(mm)	(in)	(mm)
.562	14	1.156	29	1.844	47

Selection guide

Primary ampere rating	Continuous current rating		IEEE metering accuracy					IEEE relaying accuracy	Thermal rating*	Style number
	30° C	55° C	B-0.1	B-0.2	B-0.5	B-0.9	B-1.8			
Type SCL (5.75" window)										
200	2.0	1.5	1.2	1.2	2.4	-	-	C10	100	7526A81G01
300	2.0	1.5	0.6	0.6	1.2	2.4	-	C10	100	7526A81G02
400	2.0	1.5	0.6	0.6	1.2	2.4	-	C20	100	7526A81G03
600	2.0	1.5	0.3	0.3	0.3	0.6	1.2	C20	100	7526A81G04
800	2.0	1.5	0.3	0.3	0.3	0.3	0.6	C20	100	7526A81G05
1000	1.5	1.0	0.3	0.3	0.3	0.3	0.6	C50	80	7526A81G06
1200	1.5	1.0	0.3	0.3	0.3	0.3	0.3	C50	80	7526A81G07
1500	1.33	1.0	0.3	0.3	0.3	0.3	0.3	C50	60	7526A81G08
2000	1.33	1.0	0.3	0.3	0.3	0.3	0.3	C50	60	7526A81G09
2500	1.33	1.0	0.3	0.3	0.3	0.3	0.3	C50	60	7526A81G10
3000	1.33	1.0	0.3	0.3	0.3	0.3	0.3	C50	60	7526A81G11
4000	1.33	1.0	0.3	0.3	0.3	0.3	0.3	C50	60	7526A81G12
Type SCL-D (5.75" window)										
200	2.0	1.5	0.6	1.2	2.4	-	-	C10	100	7526A82G01
300	2.0	1.5	0.6	0.6	1.2	2.4	-	C20	100	7526A82G02
400	2.0	1.5	0.3	0.3	0.6	1.2	2.4	C20	100	7526A82G03
600	2.0	1.5	0.3	0.3	0.3	0.6	1.2	C50	100	7526A82G04
800	2.0	1.5	0.3	0.3	0.3	0.3	0.6	C50	100	7526A82G05
1000	1.5	1.0	0.3	0.3	0.3	0.3	0.3	C100	80	7526A82G06
1200	1.5	1.0	0.3	0.3	0.3	0.3	0.3	C100	80	7526A82G07
1500	1.33	1.0	0.3	0.3	0.3	0.3	0.3	C100	60	7526A82G08
2000	1.33	1.0	0.3	0.3	0.3	0.3	0.3	C100	60	7526A82G09
2500	1.33	1.0	0.3	0.3	0.3	0.3	0.3	C100	60	7526A82G10
3000	1.33	1.0	0.3	0.3	0.3	0.3	0.3	C100	60	7526A82G11
4000	1.33	1.0	0.3	0.3	0.3	0.3	0.3	C100	60	7526A82G12

* times normal, one second

Mechanical rating: 180 x rated current

Additional styles available upon request. Contact your ABB sales representative or call +1-252-827-3212 for more information.

Optional accessories

- Mounting feet for SCL 9625A64G02
- Mounting feet for SCL-D 9625A64G03

For more information please contact:

ABB Inc.
Medium Voltage Distribution Components
3022 NC 43 North
Pinetops, NC 27864
USA
Phone: +1 252 827 3212
Fax: +1 252 827 4286

www.abb.com/mediumvoltage

Note:

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document. We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction—in whole or in parts—is forbidden without ABB's prior written consent.

Copyright 2009 ABB.
All rights reserved.



UL Recognized Component; File No. E96461